GameChanger® THE CAT6 THAT GOES TWICE AS FAR

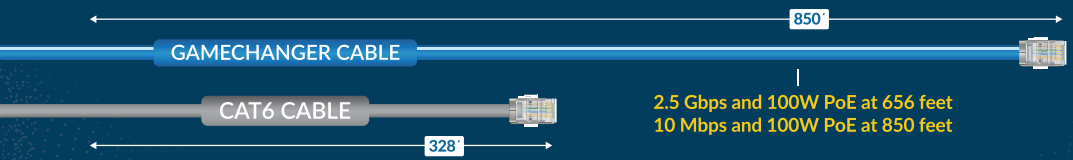

2.5 Gbps and 100W PoE at 656 feet
10 Mbps and 100W PoE at 850 feet

Paige® DATACOM SOLUTIONS

Model Type	Part Number (-- = Color Code)	01 Orange	03 Purple	04 Black	06 Blue	07 Yellow	08 Pink	09 Green	10 White	11 Gray	33 Yellow w/ White Stripe	36 Blue w/ White Stripe	45 Silver (metallic)	Package	UL Listing	UV Resistant	Suitable for Wet Locations	Direct Burial	600V Rating	Shielded	Armored	Special Attributes	Min. Operating Temp (C)	Max. Operating Temp (C)	Outer Diameter (in)
Riser	2583103--				●					●	◐				CMR								0	+75	.236
FT4	2584403--							●							CMR FT4								0	+75	.236
Plenum	2583003--	●	●	●		●		●	○			◐			CMP FT6								-20	+105	.220
Plenum Shielded	2583705--				●										CMP FT6					✓			-20	+90	.280
I/O Plenum	2589503--			●*	●*		●*		○*						CMP FT6	✓	✓					Oil/ Gas	-70	+200	.220
OSP	2583208--			●												✓	✓	✓					-45	+60	.300
OSP Shielded	2583408--			●											CM-LS	✓	✓	✓	✓	✓			-45	+80	.340
AIA OSP Shielded	2588808--												◐		CM-LS	✓	✓	✓	✓	✓	AIA		-45	+80	.340
CID1	2588024--			●											ITC-HL	✓	✓				CCW	Haz Loc	-50	+90	.984

* The Indoor/Outdoor Plenum jacket is made from FEP which will appear transparent and more subtle in color.
U.S. Patent No.s 10,453,589, 11,107,605, 11,562,835, 11,646,133 and 12,142,389

Online Resources

Scan the QR code to get more information.

paigedatacom.com/gamechanger

Access Control Cables

Advanced, Secure & Complete.
With (2) 22AWG Low Cap twisted pairs, you can deliver it all.

Paige® DATACOM SOLUTIONS

Access Control Composite Cable

++ = Put Up -- = Color

Part Number Family	03	06	07	08	03 Purple	04 Black	07 Yellow	10 White	11 Gray	UL Listing	Card Reader Element	Door Contact	REX/Motion	Power Lock	Min. Operating Temp (C)	Max. Operating Temp (C)	Outer Diameter (in)	Weight (lbs) per 1,000 ft
23665++--	-	250' Reel	500' Reel	1000' Reel	●		●	○		CMP	22/2PR STR LoCap + 18/2 STR OAS	22/4 STR	22/4 STR	16/2 STR	-5°C	75°C	.570	125
23688++--	-	250' Reel	500' Reel	1000' Reel		●			●	CMR/CMX	22/2PR STR LoCap + 18/2 STR OAS	22/4 STR	22/4 STR	16/2 STR	-5°C	75°C	.528	130

OSDP Reader Cable

++ = Put Up -- = Color

Part Number Family	03	06	07	08	03 Purple	04 Black	07 Yellow	10 White	11 Gray	UL Listing	Card Reader Element	Door Contact	REX/Motion	Power Lock	Min. Operating Temp (C)	Max. Operating Temp (C)	Outer Diameter (in)	Weight (lbs) per 1,000 ft
22280++--	1,000' Box	-	-	-	-	-	●	-	-	CMP	22/1PR Shielded LoCap+ 18/2c	-	-	-	-5°C	75°C	.187	25

Online Resources

Scan the QR code to get more information.

paigedatacom.com/osdp

© 2026 Paige Electric Company, L.P. All rights reserved.

07/26 GCSSG1